

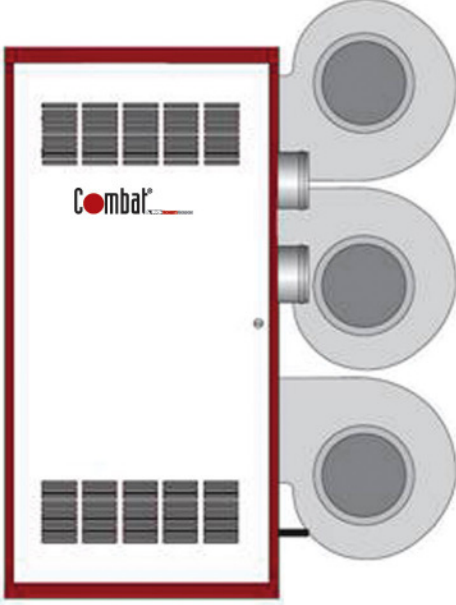


CTU B/C serileri


CTUB Serisi

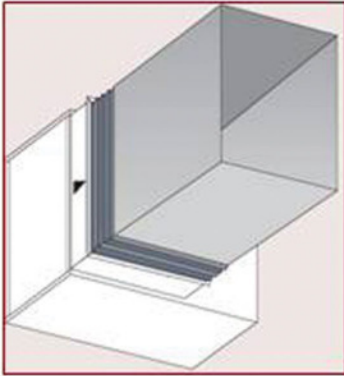

CTUC Serisi

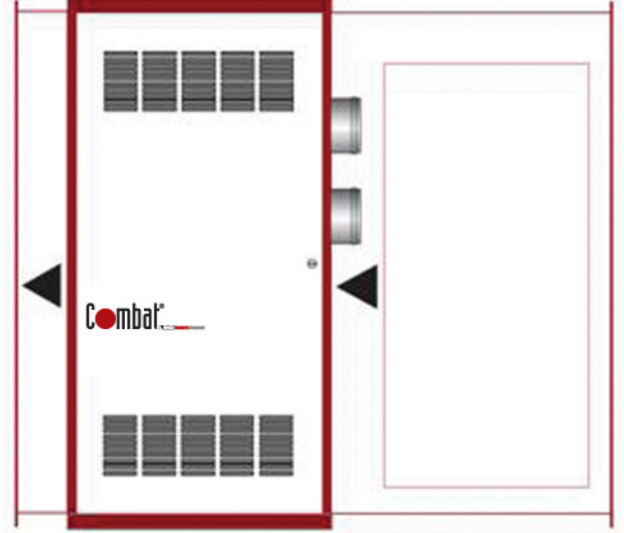


- Kanala bağlanabilme
- Yüksek basınçlı radyal fan
- Termostatik kontrol
- %92 net verim
- Hermetik çalışma
- C serilerinde karışım odası ile taze hava ısıtma

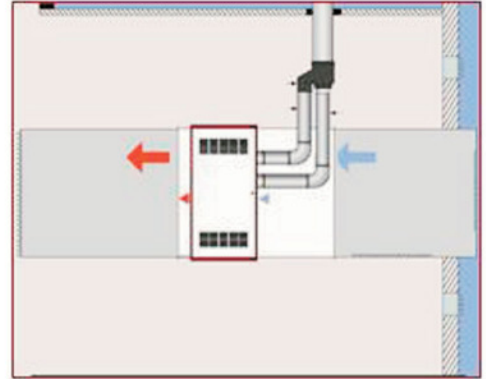

Model		CTUB-22	CTUB-30	CTUB-40	CTUB-50	CTUB-60	CTUB-75	CTUB-90	CTUB-100	CTUB-115
Model		CTUC-22	CTUC-30	CTUC-40	CTUC-50	CTUC-60	CTUC-75	CTUC-90	CTUC-100	CTUC-115
Norminal Isıl Güç	KW	25	30	43	55	63	86	100	107	121
	kcal/sa	21500	25800	36980	47300	54180	73960	86000	92020	104060
Çıkış Gücü	KW	23	27	39	51	58	78	91	98	111
	kcal/sa	19780	23220	33540	43860	49880	67080	78260	84280	95460
Doğalgaz Tüketimi	Nm3/sa	2,61	3,13	4,48	5,73	6,57	8,96	10,42	11,15	12,61
LPG Tüketimi	kg/sa	1,92	2,30	3,30	4,22	4,84	6,60	7,68	8,22	9,29
Gaz Bağlantısı	R	1/2"	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"	3/4"
Giriş Basıncı	mbar	Doğalgaz (maks. 55 mbar , min. 17 mbar) LPG (maks. 55 mbar , min. 25 mbar)								
Elektrik Besleme		230 V, 50 Hz								
Hava Debisi	m3/sa	3300	3300	3300	5500	5500	6400	6400	9400	9400
Elektrik Gücü	W	550	550	550	1100	1100	1100	1100	1650	1650
Karşılabilir toplam direnç	Pa	120	120	120	220	220	170	170	280	280

CTUD serisi

- Kanal üzerine montaj
- %92 net verim
- Hermetik çalışma
- Termostatik Kontrol

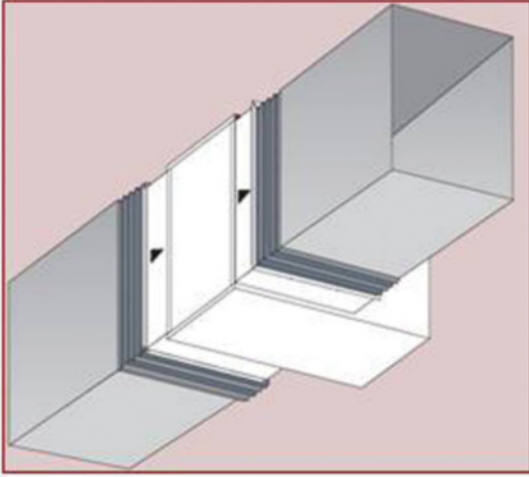

Model		CTUD-22	CTUD-30	CTUD-40	CTUD-50	CTUD-60	CTUD-75	CTUD-90	CTUD-100	CTUD-115
Norminal Isıl Güç	KW	25	30	43	55	63	86	100	107	121
	kcal/sa	21500	25800	36980	47300	51428	73960	86000	92200	104060
Çıkış Gücü	KW	23	27	39	51	58	78	91	98	111
	kcal/sa	19780	23220	33540	43860	49880	67080	78260	84280	95460
Doğalgaz Tüketimi	Nm ³ /sa	2,61	3,13	4,48	5,73	6,57	8,96	10,42	11,15	12,61
LPG Tüketimi	kg/sa	1,92	2,30	3,30	4,22	4,84	6,60	7,68	8,22	9,29
Gaz Bağlantısı	R	1/2"	1/2"	1/2"	1,1/2"	1,1/2"	3/4"	3/4"	3/4"	3/4"
Giriş Basıncı	mbar	5	5	7	9	11	12	14	15	17
Elektrik Besleme	mbar	Doğalgaz (maks. 55 mbar , min. 17 mbar) LPG (maks. 55 mbar , min. 25 mbar)								
Eşanjör Basıncı Kaybı		30Pa								
Hava Debisi	m ³ /sa	3300	3300	3300	5500	5500	6400	6400	9400	9400